



IntelliPay™

V400C Setup

Hardware List

- 1X USB to RJ50 Cable
- 1X Power adapter
- 1X V400 Terminal

Connecting the V400C to the Computer

1. Locate the USB to RJ50 cable and plug it into the V400 as shown in figure 1 below.

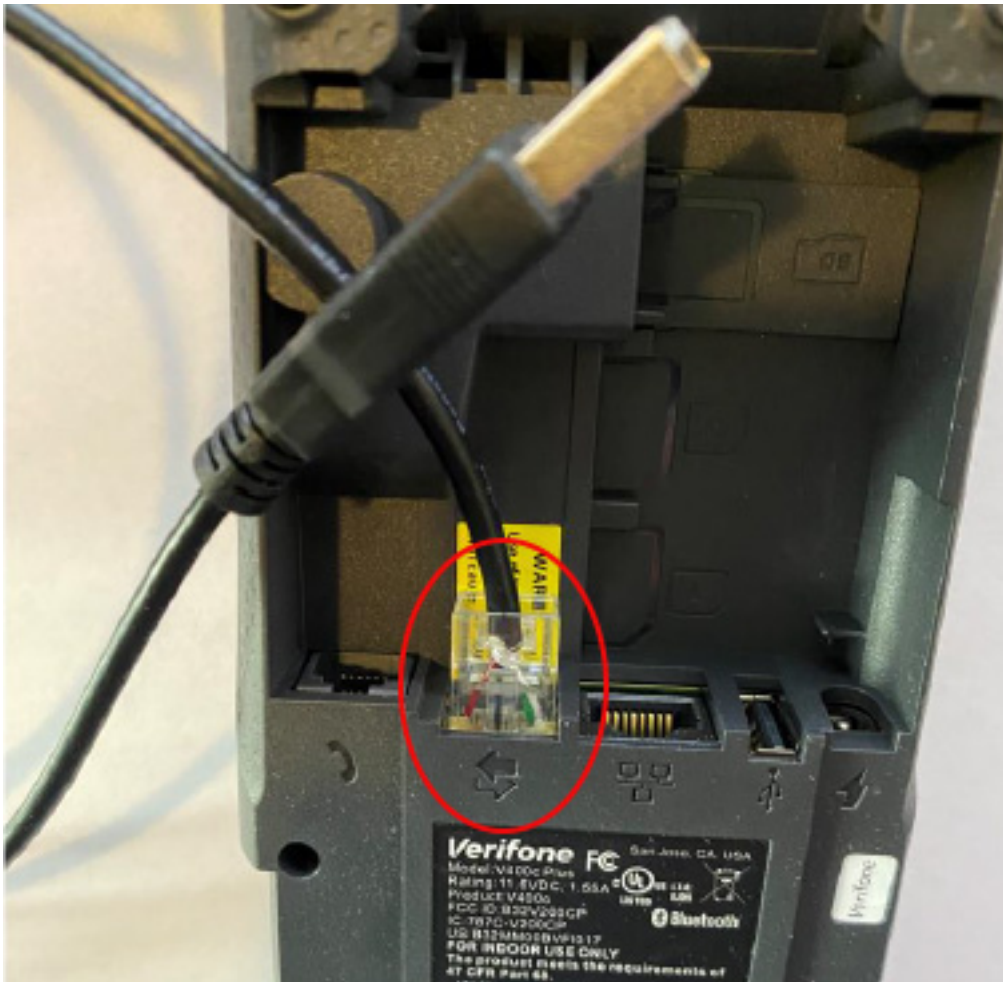


Figure 1 - USB to RJ50 cable connected to the V400c.

2. Plug in the Ethernet cable as shown in Figure 2 below.. *Note that the V400 requires an Ethernet Connection in order to communicate the transactions to the gateway. The USB cable is to send the commands in POS mode to the terminal and receive non-PCI data back to the POS.

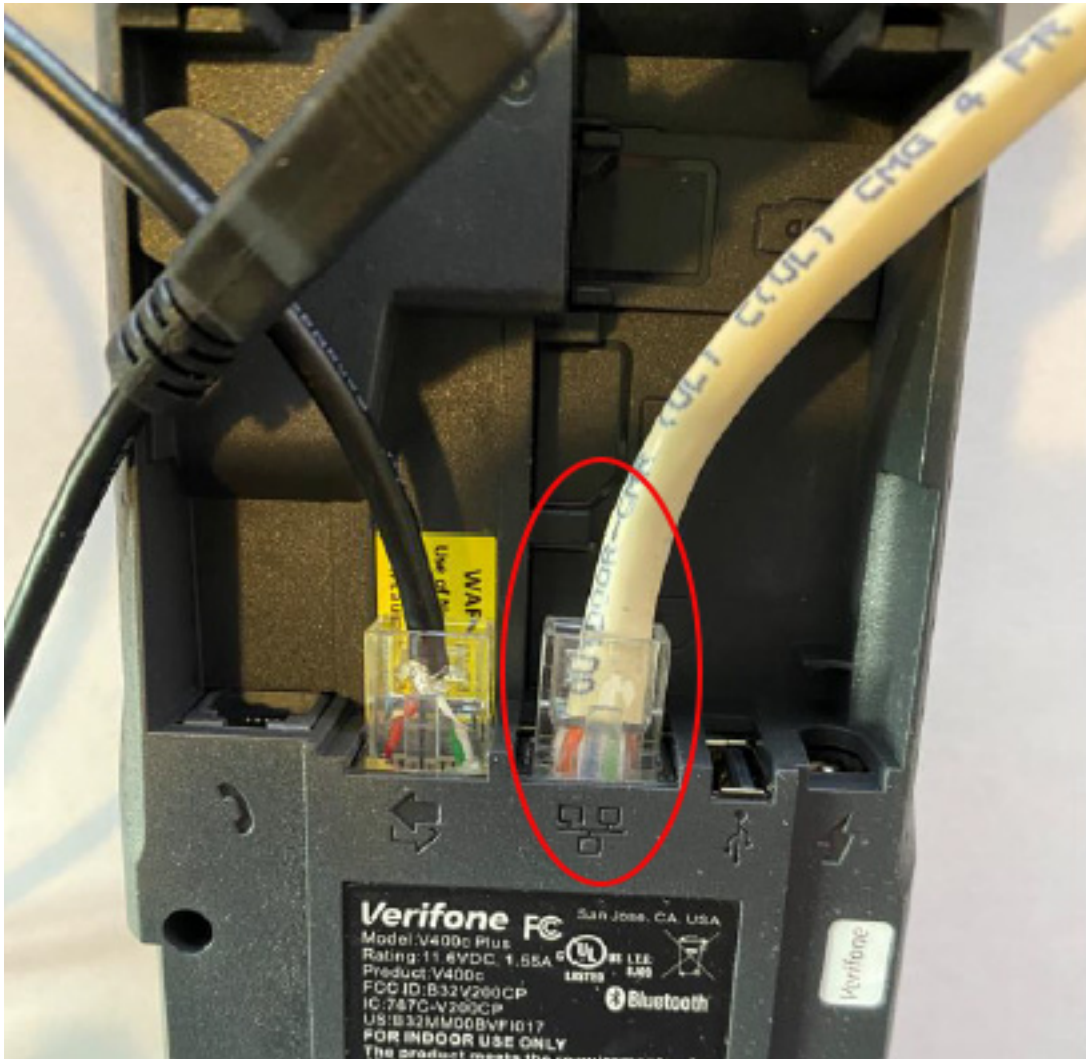


Figure 2 - Ethernet cable connected to the V400C

3. Connect the power cable to the terminal and first plug the terminal into the PC before powering on the device itself.



Figure 3 - Power cable connection

- 4. If your Terminal does not look like this when powering It up, you need to contact IntelliPay


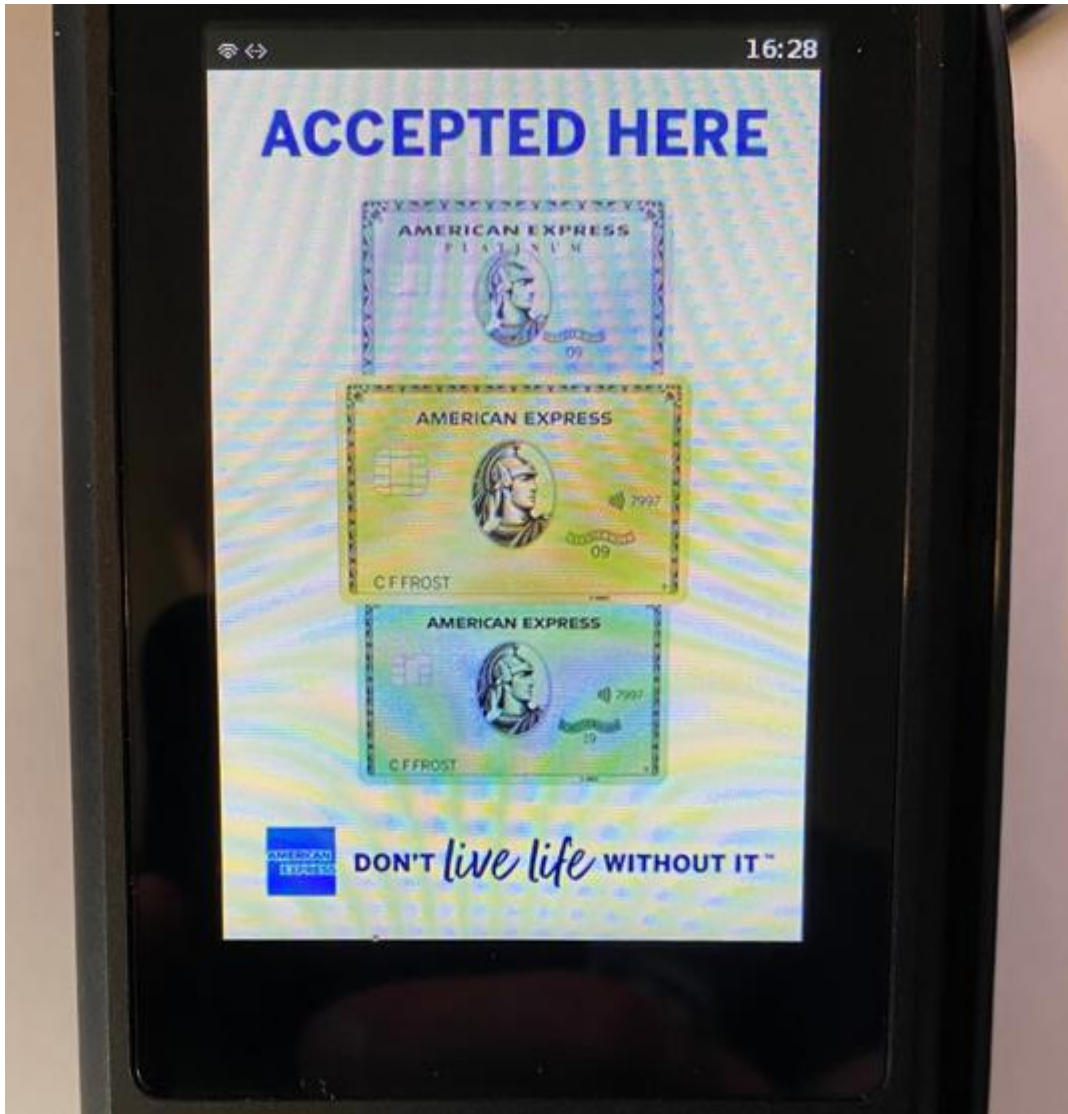



Figure 4 - acceptance screen

Installing the V400 SAAS Service


1. Download the Installer file from the CPTeller site.
2. Hit Next

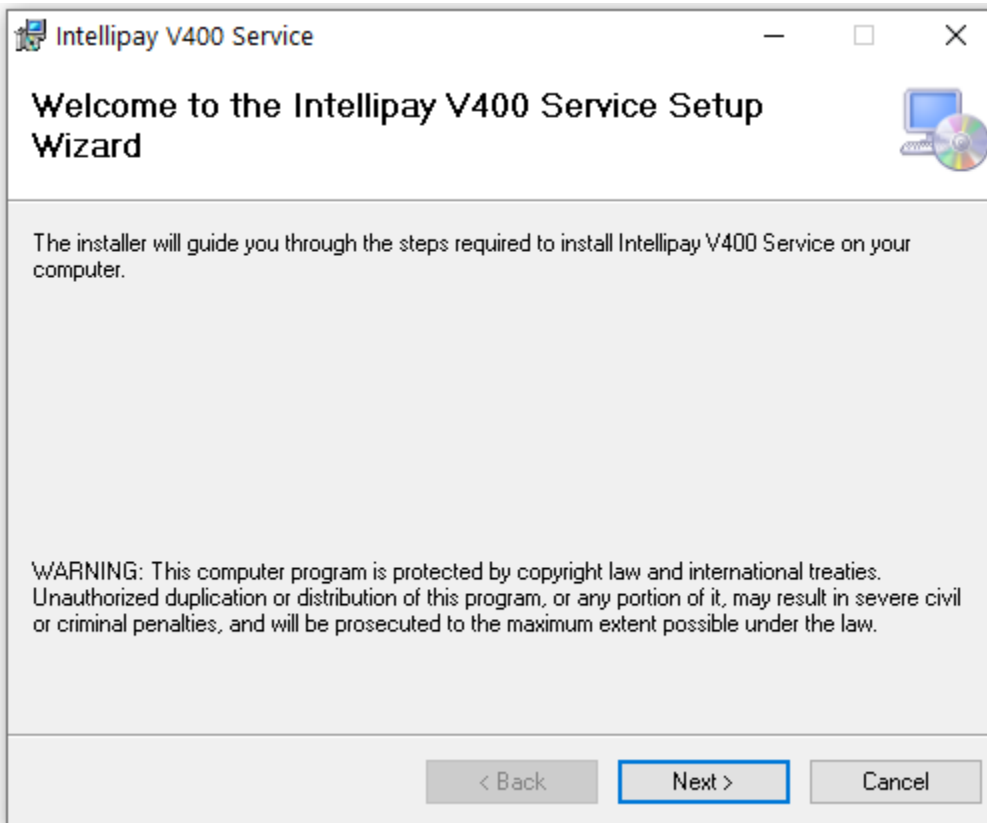


3. Hit Next

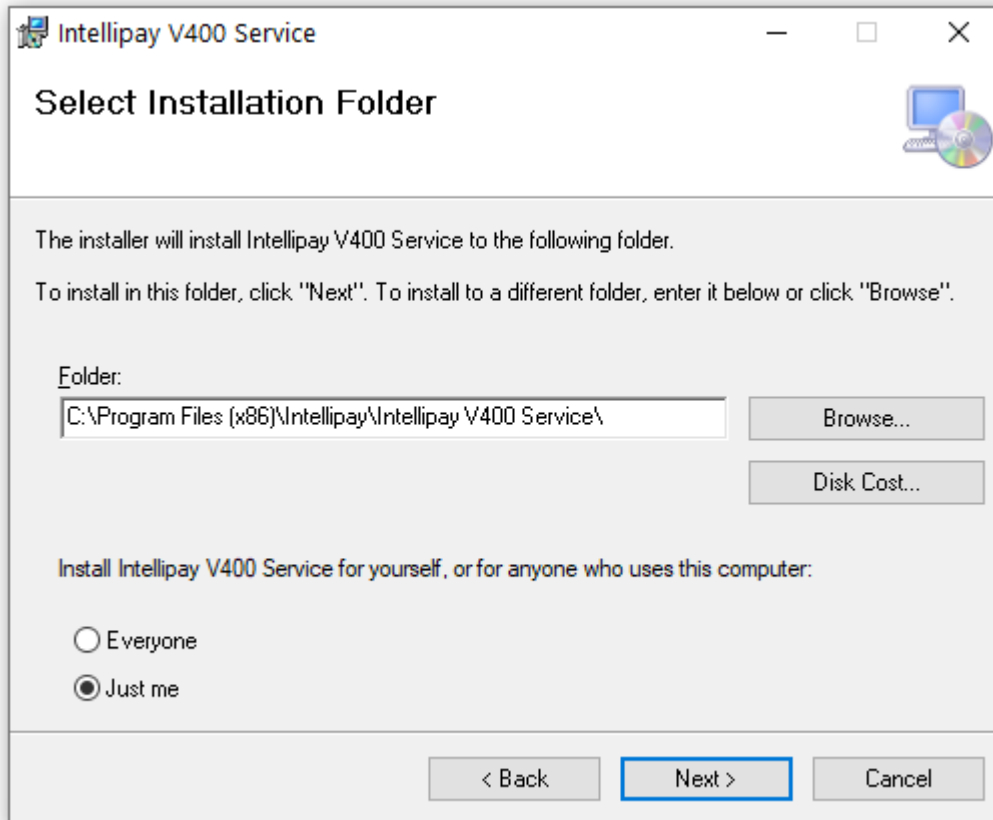


4. Hit Next and the installer will install the service

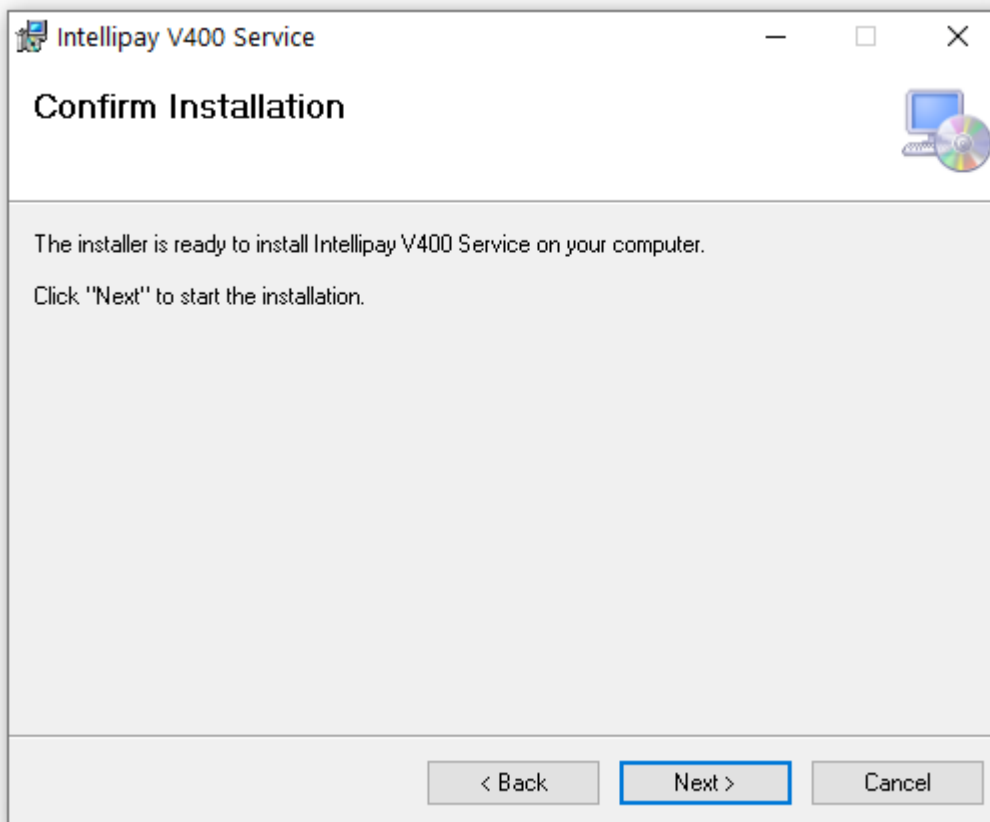

5. You might be prompted to allow the application to install by windows and also by your antivirus. When you get to the last screen select Close.

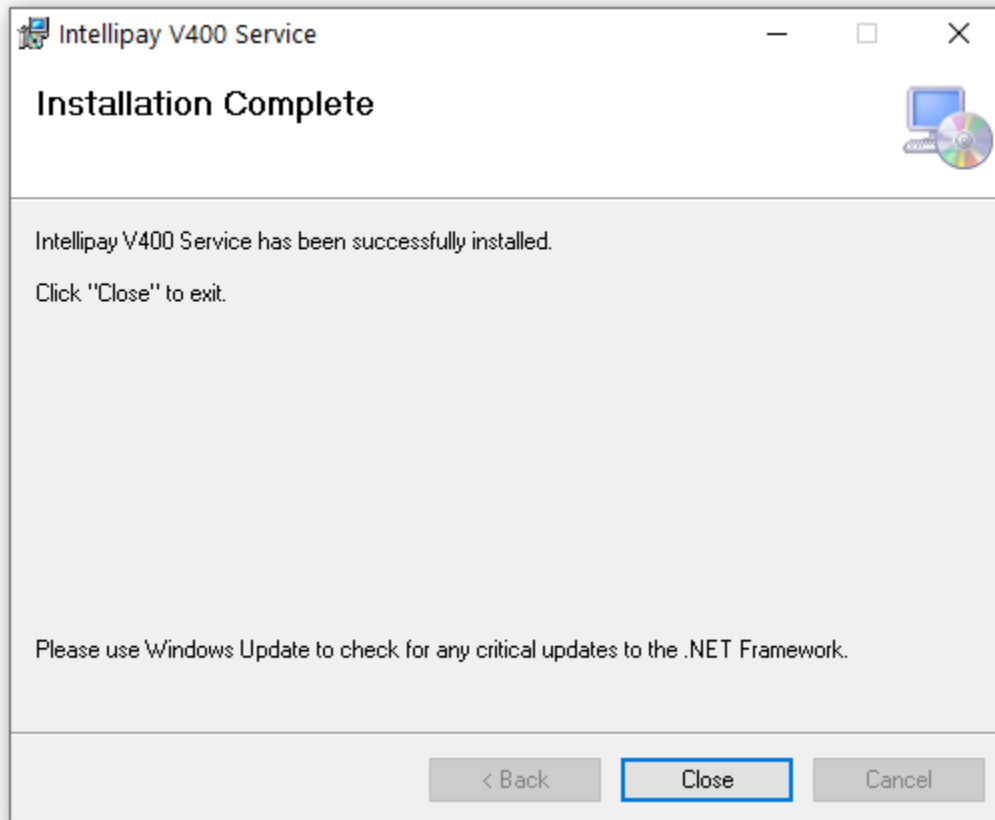


6. Another box will be opened up like the one below, You will need to put your Merchant Key and API key in before continuing.


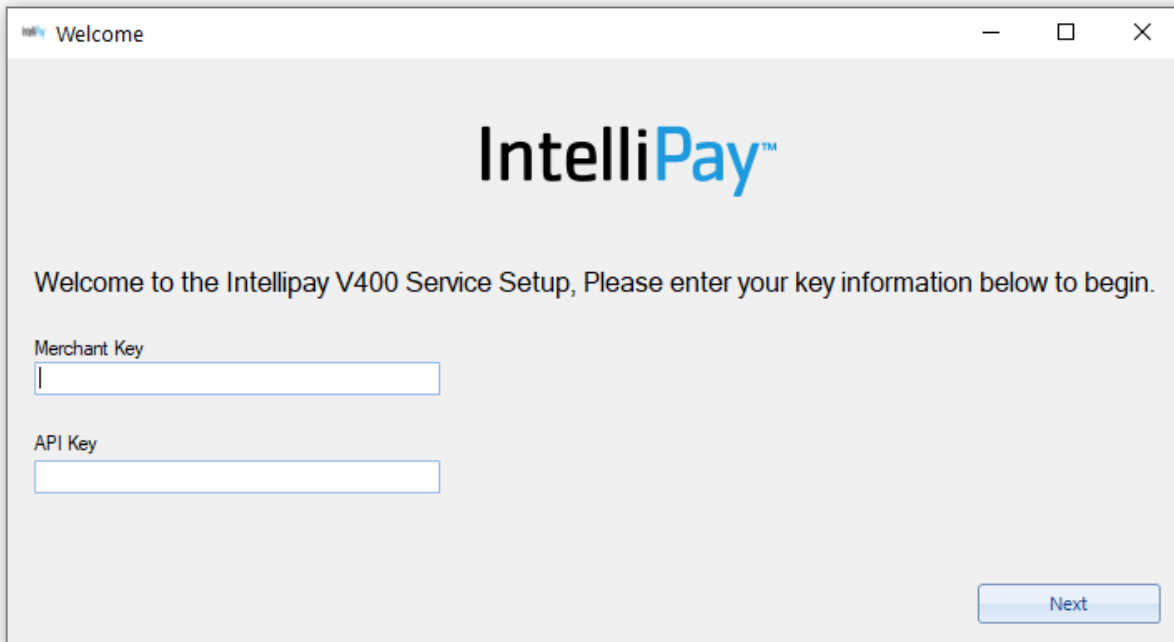


The image shows a software window titled "Welcome" with standard window controls (minimize, maximize, close) in the top right corner. The window has a light gray background. In the center, the "IntelliPay™" logo is displayed in a large, bold, blue font. Below the logo, a message reads: "Welcome to the Intellipay V400 Service Setup, Please enter your key information below to begin." Underneath this message, there are two input fields. The first is labeled "Merchant Key" and the second is labeled "API Key". Both fields are empty and have a thin blue border. In the bottom right corner of the window, there is a blue button with the text "Next" in white.

- 7. Hit Next and it should connect to the SAAS service and open up this screen.

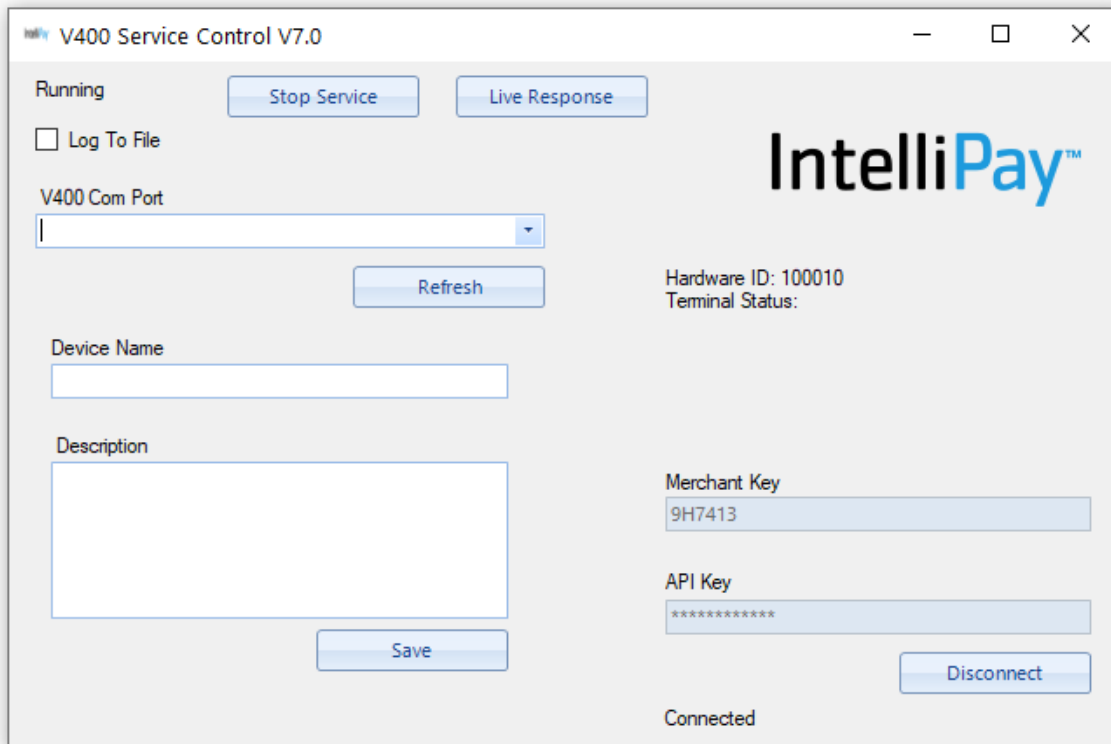

8. You need to select the COM port that the V400 is connected to.

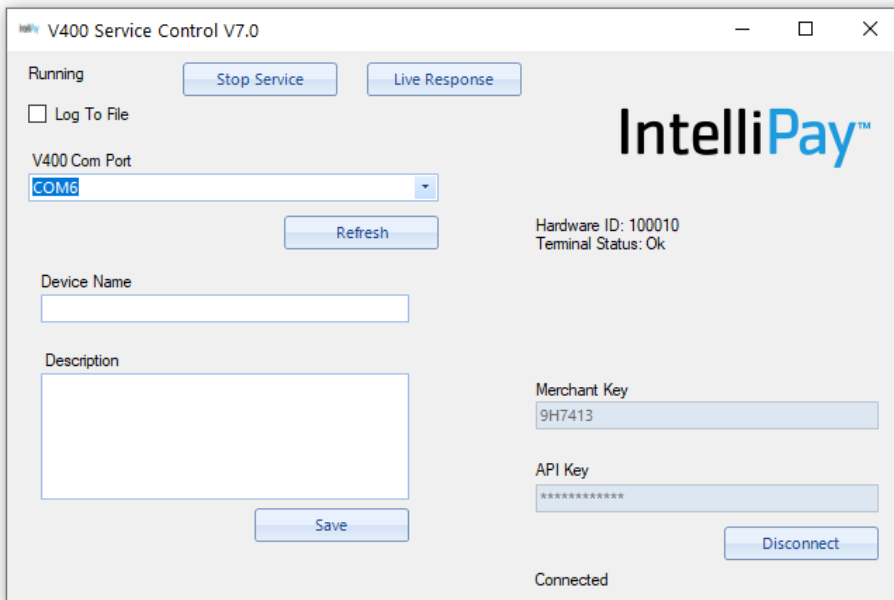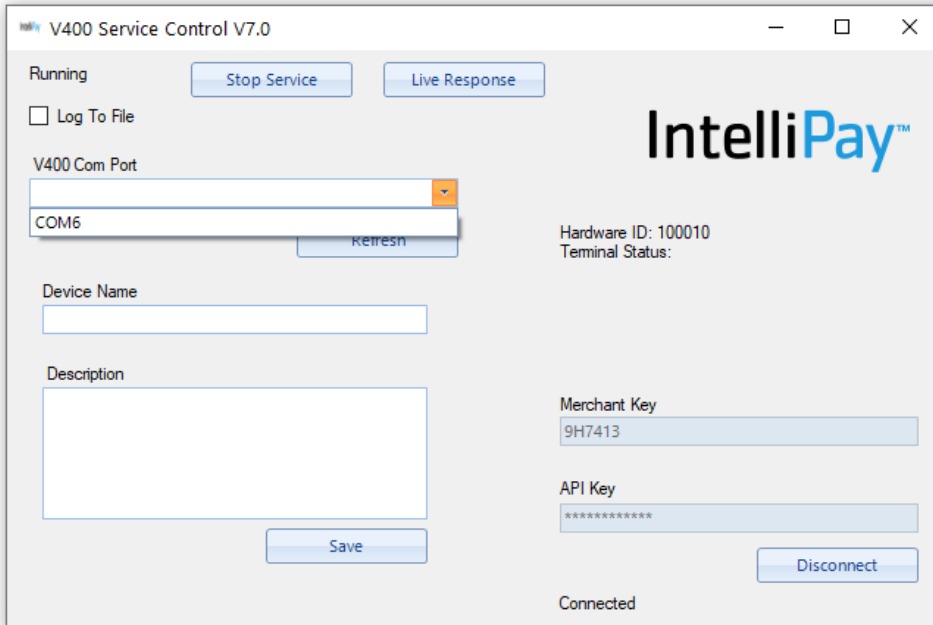

9. You can elect to name the device and save it if you would like

V400 Service Control V7.0

Running

Log To File

V400 Com Port
COM6

Device Name
Front Office

Description
Draper Location Front Office

IntelliPay™

Hardware ID: 100010
Terminal Status: Ok

Merchant Key
9H7413

API Key

Connected

The terminal is now ready to receive a transaction from the POS.

Support Notes

- Logging
 - Log To File
 - Will be located in c:\IP\Log.txt
 - Regular Logging
 - Sends directly to the Event Viewer

IntelliPay™

support@intellipay.com
855-872-6632